

QSDC-500-8500-K1-40-N

0.5~8.5GHz, 100W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~8.5GHz
Insertion Loss:	0.5dB max.
Coupling:	40±2dB @500~6000MHz 41±3.5dB @6000~8000MHz
Directivity:	12dB min.
Coupling Flatness::	±1.5dB @500~6000MHz
VSWR (Mainline):	1.3 max.
VSWR (Coupling):	1.5 max.
Average Power:	100W
Impedance:	50Ω

Mechanical

Size ^{*1} :	38.1*38.1*27.6mm 1.5*1.5*1.087in
Connectors:	N Female
Mounting:	4-Φ3.8mm through-hole

[1] Exclude connectors

Environmental



Operation Temperature:	-40~+85°C
------------------------	-----------

How To Order

QSDC-500-8500-K1-40-N

Customization is available upon request.

Outline Drawings

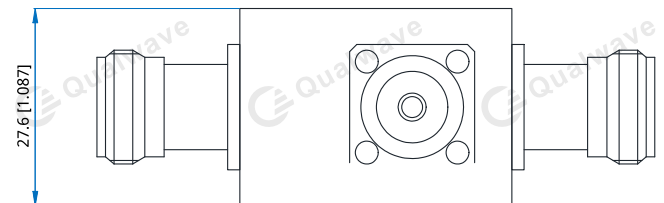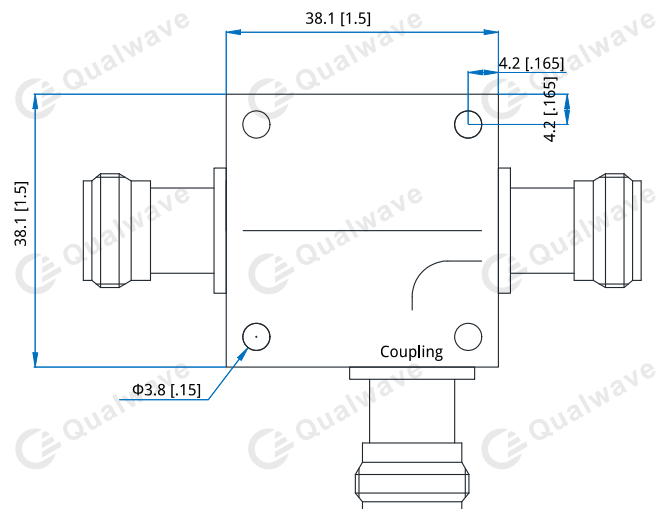

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]