

QAM3N

NMD 3.5mm to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~18GHz
VSWR: 1.15 max.
Impedance: 50Ω


Environmental

Temperature: -55~+165°C

Mechanical

RF Connectors: NMD 3.5mm
N
Mating Life Cycle: 2000 cycles min. (Outline B, C)
Outer Conductor: Passivated SUS303 stainless steel
Dielectric: PEI
Inner Conductor: Gold plated beryllium copper

Outline Drawings

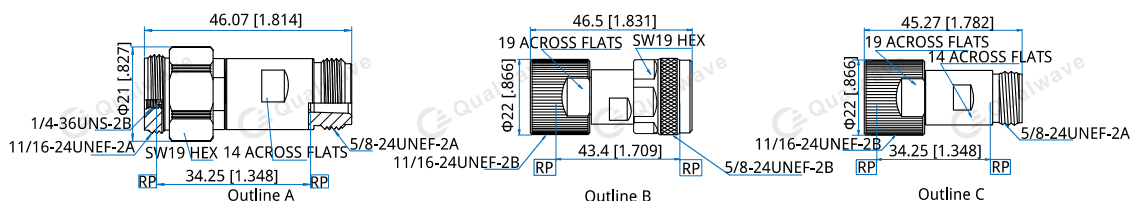

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QAM3N-MF - NMD 3.5mm (m) to N (f), Outline A

QAM3N-FM - NMD 3.5mm (f) to N (m), Outline B

QAM3N-FF - NMD 3.5mm (f) to N (f), Outline C

Customization is available upon request.