

### Product features

High performance, stable amplitude and phase cables, suitable for vector network analyzers.  
Low VSWR, high reliability.


### Main specifications

Items	Min	Type	Max	Units
Frequency	DC	~	50	GHz
IL			2.8	dB
VSWR			1.3	

### Other parameters

Cable category	Paired use of two pieces
Length	630mm
Cable outer diameter	14.8mm
Impedance	50Ω
Operation Temp.	-30~+85°C Design assurance
Cable interface 1	NMD2.4-K&2.4-K
Cable interface 2	NMD2.4-K&NMD2.4-J


### Typical test curve

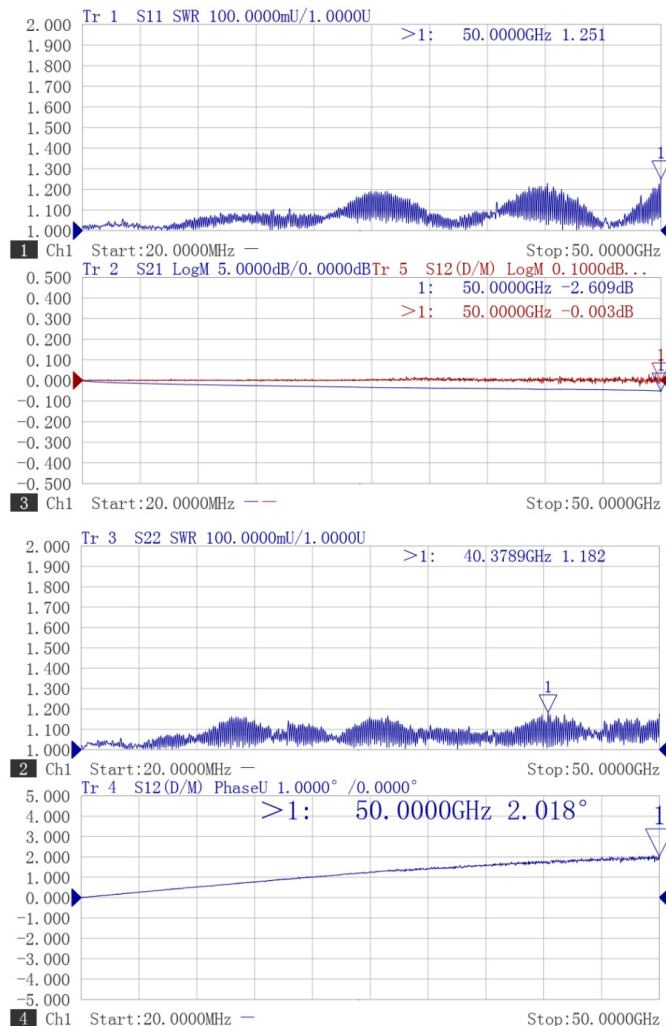


### Reference picture



### Configuration(mm)

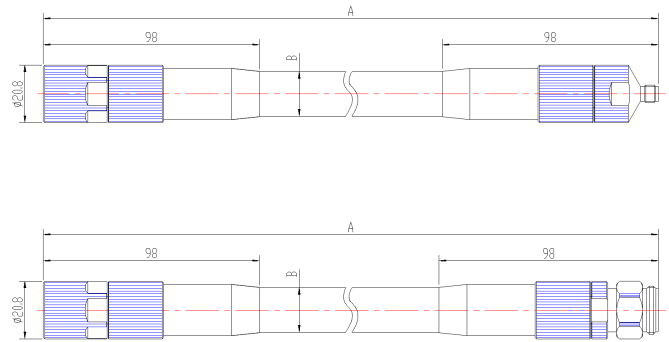

### Cable structure diagram

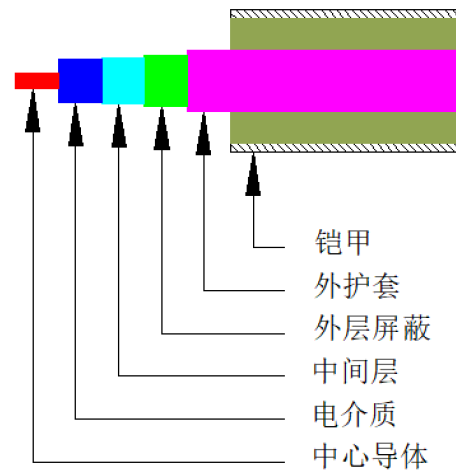

### Note

1	Suggest reusing radii greater than 36mm
2	Use standard Torque wrench for cable removal.

