

Product features

High performance, stable amplitude and phase cables, suitable for vector network analyzers.
Low VSWR, high reliability.



Main specifications

Items	Min	Type	Max	Units
Frequency	DC	~	26.5	GHz
IL			1.8	dB
VSWR			1.2	

Other parameters

Cable category	Paired use of two pieces
Length	630mm
Cable outer diameter	14.8mm
Impedance	50Ω
Operation Temp.	-30~+85°C Design assurance
Cable interface 1	NMD3.5-K&3.5-K
Cable interface 2	NMD3.5-K&NMD3.5-J


Typical test curve

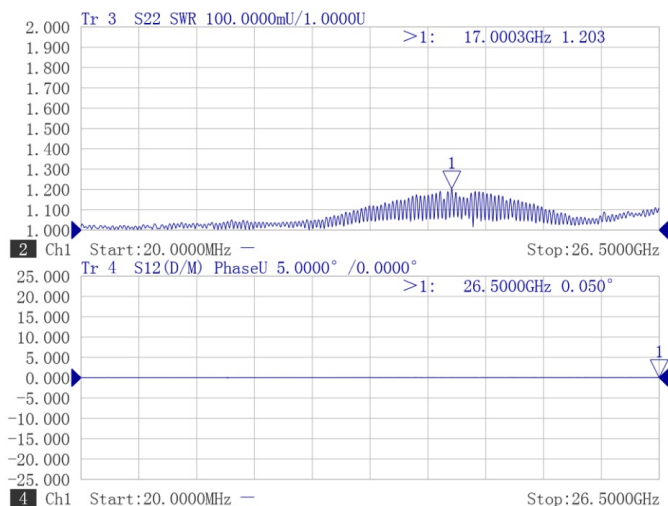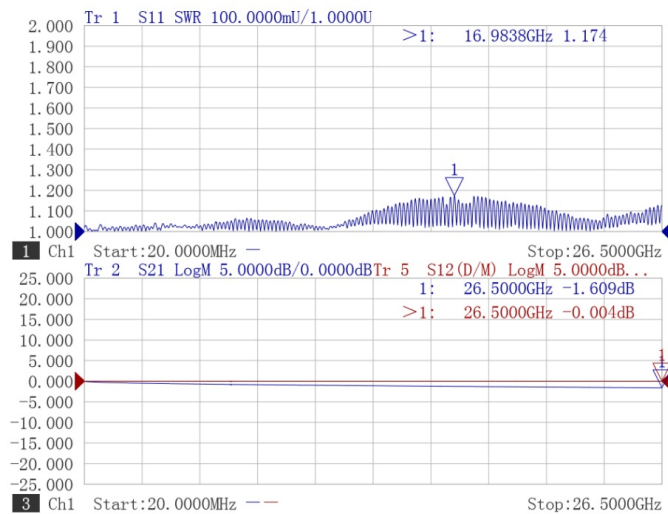


Reference picture



Configuration(mm)

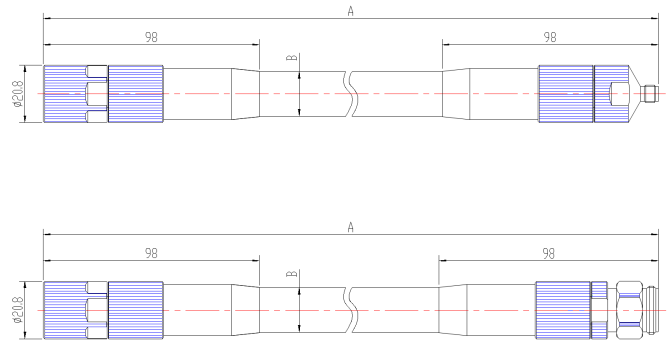

Cable structure diagram



Note

- 1 Suggest reusing radii greater than 36mm
- 2 Use standard Torque wrench for cable removal.

